



Graphite Fiber Packing


ICP 925Te

Description:

Braided packing manufactured from graphite fiber yarn blended with PTFE lubricant.

Key Features:

- It has a low coefficient of friction.
- Resistant to a wide range of chemicals with exception of powerful oxidizers.
- Excellent thermal conductivity and resilience, which is unaffected by changes in temperature.

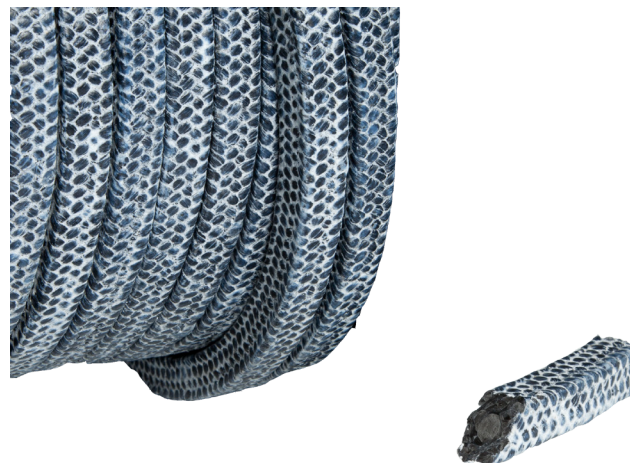

Applications:

- An exceptional packing for use in dynamic applications, such as centrifugal pumps, mixers and agitators.
- Suitable for a wide range of applications such as petrochemical plants, power plants, refineries, pharmaceutical, etc.

Technical Specifications:

	P (bar / psi)	V (m/s)	T (°C / °F)		pH
			Min	Max	
	30 / 435	20	-200 / -328	650 / 1202	0 - 14
	250 / 3625	3			
	250 / 3625	-			

Availability:

ICP 925Te packing is available in the following sizes and weights:

Section	mm	4	5	6	6,4	8	10	11	12	12,7	14	16	18	19	20	22	25
	in	-	3/16"	-	1/4"	5/16"	3/8"	7/16"	-	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	1"
grams per meter	[g] / [m]	20	30	40	50	75	115	140	165	185	225	300	370	450	460	560	720
Roll Length	[m] / roll	75	50	37,5	30	33,3	21,7	17,8	15,2	13,5	22,2	16,6	13,5	11,1	10,9	8,9	6,9
Box weight	Kg	1,5				2,5					5						